


# TS701c 17" Universal Touch Screen LCD Monitor



This monitor is fitted with a 5-wire resistive touch technology which provides high clarity, exceptional durability and reliability. An ideal solution for repetitive applications such as POS, office and hospitality applications. The screen is pressure sensitive and so will work equally well with any input device such as a stylus or finger. It comes fitted with a height adjustable stand which can be easily removed allowing it be wall mounted. Just like the entire Edge10 range this monitor is backed by a three year on site exchange warranty.

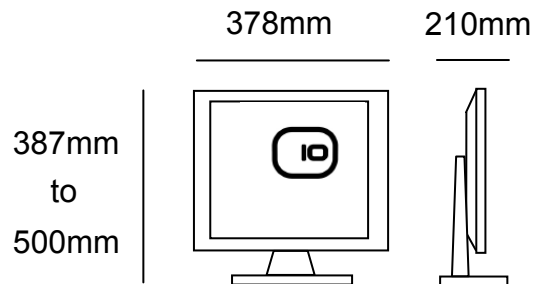

USB / 'FG' & interface for touch

Monitor Cosmetics:	Black bezel with black stand and black rear cabinet
LCD:	17" active matrix, thin film transistor (TFT) LVDS
Touch Technology:	5 wire resistive
Touch Screen Interface:	USB and RS232 (software included)
Pixel Pitch (mm):	0.264mm
Native Resolution:	SXGA+ 1280 x 1024
Scan Frequency:	Horizontal: 31.5kHz - 80kHz Vertical: 50Hz - 75Hz
View Angle:	Horizontal: 140° Vertical: 130°
Display Area (mm):	338 (H) x 270 (V)
Display Colour:	16.2 Million (6 bits +FRC)
Contrast Ratio:	450:1
Brightness:	300 cd/m <sup>2</sup>
Response Time:	2ms
Anti-theft Security:	Kensington® Lock
Compatibility:	Windows 95/98/98SE/Me/NT4/2000/XP/Vista, Mac OS, Macintosh, Linux Plug & Play - DDC1/2B
Input Video Signal:	Analogue: (Connector: 15 pin D-sub) 0.7 Vp-p separate sync. TTL level, RGB analogue, Detachable cablePower Internal
Power Supply:	Internal
Power management (EPA Compliant):	Normal operation: < 50W Off/Suspend/Stand-by mode: < 3W
Operation Environment: Temperature:	0°C to 40°C Humidity: 20% - 80%
Tilt Angle:	Max. Forward tilt 5° Max. backward tilt: 15°
Weight:	Net: 7.56kg
Dimensions (W x D x H):	378 x 210 x 387 to 500mm (height adjustable)
VESA Wall Mount Compliant:	100mm x 100mm & 75mm x 75mm
Warranty:	Three year on-site exchange

Edge10 Corporation Limited, Millenium Business Centre, Humber Road, London NW2 6DW  
 T: +44 (0)280 280 7281 | F: +44 (0) 208 450 7744



Compliant with ISO-13406-2 regarding pixel faults. Specifications are subject to change without notice